

# Accessories

## Faceplate



A new range of gang faceplates and associated blanks white and black colour.

### Features

- Flush mount installation
- Accept all SL Series Jacks
- Mid-size faceplate



Part Number	Description	Color
250001-02	Faceplate 1 port univ.	white
250002-02	Faceplate 2 ports univ.	white
250003-02	Faceplate 3 ports univ.	white
250004-02	Faceplate 4 ports univ.	white
250000-02	Blank for faceplate white univ.	white
250001-01	Faceplate 1 port univ.	black
250002-01	Faceplate 2 ports univ.	black
250003-01	Faceplate 3 ports univ.	black
250000-01	Blank for faceplate black univ.	black

## Wall box for faceplate



Wall Box for Faceplate

### Features

- Series 305
- Depth 40mm
- Wall mounted

Part Number	Description	Color
251005-01	Wall box for faceplate 503 series for outdoor	white
251005-02	Wall box for faceplate 503 series for outdoor	ivory

## Electrical line adapter series

A lot of adapters completes the Orca's accessories offer. Pack of 20 pieces.



Part Number	Description	Packaging	Color
288000-02	Adapter AVE RAL Series	20 pc	white
281000-08	Adapter ABB Elos series	20 pc	Black
281000-10	Adapter ABB Chiara series	20 pc	white
288000-03	Adapter AVE Blanc series	20 pc	ivory
288000-01	Adapter AVE Banquise series	20 pc	white
288000-00	Adapter AVE Noir series	20 pc	black
288000-04	Adapter AVE RAL series	20 pc	grey
285000-00	Adapter Axolute series	20 pc	silver
285000-01	Adapter Axolute series	20 pc	black
283000-02	Adapter Living Light series	20 pc	white
284000-04	Adapter Living Light series	20 pc	silver
281000-09	Adapter Luna series	20 pc	white
282000-02	Adapter Living series	20 pc	black
282000-03	Adapter Living International series	20 pc	black
281000-05	Adapter Magic series	20 pc	ivory
281000-06	Adapter Magic TT series	20 pc	ivory
280000-06	Adapter Matix series	20 pc	white
287000-02	Adapter Gewiss 9000 System series	20 pc	black
287000-01	Adapter Gewiss 9000 System series	20 pc	white
287000-05	Adapter Gewiss Chorus Titanio series	20 pc	silver
287000-03	Adapter Gewiss Chorus series	20 pc	black
287000-04	Adapter Gewiss Chorus series	20 pc	white
287000-00	Adapter Gewiss Playbus series	20 pc	black
289000-02	Adapter Legrand Cross series	20 pc	white
289000-01	Adapter Legrand Mosaic series	20 pc	white
289000-00	Adapter Legrand Vela series	20 pc	black
289000-03	Adapter Legrand Vela series	20 pc	white
286000-03	Adapter Vimar Eikon series	20 pc	silver
286000-04	Adapter Vimar Eikon series	20 pc	black
286000-05	Adapter Vimar Eikon series	20 pc	white
286000-01	Adapter Vimar Idea series	20 pc	white
286000-00	Adapter Vimar Idea series	20 pc	black
286000-02	Adapter Vimar Plana series	20 pc	
286000-06	Adapter Vimar Plana Silver series	20 pc	silver

## Splitter and Adapter F/F

The voice and data splitters (pair) runs voice and data over one CAT5E Cable. It works in both 568A and 568B wired systems. Orca offers also different Junction Adapter F/F



Part Number	Description
290000-00	CAT 5 Splitter data/voice with extension cable
290000-01	CAT 5 Splitter data/data with extension cable
290000-02	Compact CAT 5 Splitter data/data
290000-03	Compact CAT 5 Splitter voice/voice
290000-04	CAT 5 Splitter voice/voice with extension cable
290000-05	T- Splitter with 6 pins , 2F/1M Cat3
290000-06	Compact CAT 5 Splitter data/voice
291000-00	Junction Adapter F/F from RJ45 patch panel CAT5 pug UTP
291000-01	Junction Adapter F/F from RJ45 patch panel CAT5 pug FTP
291000-05	Junction Adapter F/F for plug connector CAT3
291000-06	Junction Adapter F/F for plug connector CAT5



## Utilities

Some utilities that complete the Orca Accessories 'offer.



Part Number	Description
291000-02	Connection box FTP (66x36x25.5mm)
291000-03	Connection box UTP (66x36x25.5mm)
291000-04	Tripolar Phone Socket for outdoor like Telecom



## Tie wraps

The Orca tie wraps let the fiber Optic and Category 5 cable protect from over cinching. These low cost wraps are reusable in black colour. Now provided with cutout for screw mount support



Part Number	Description	Packaging
550240-00	Black Tie wraps 12x20x200mm	50pc

# Lan Equipment

## Mini Media Converter




OCI-100 series is ORCA's answer to the need to expand existing Fast Ethernet networks. The easy implementation and expansion of 100Base-TX/FX networks can be further facilitated with this converter. The converter is completely transparent when connected, so the network performs exactly the way it did before only, now it allows the co-existence of both copper and fiber mediums. Added flexibility is available with ST, SC, and WDM Simplex SC connectors. Extra distances are possible with the single-mode version delivering up to 80km connectivity per transmission segment. The OCI-100 allows the installation of fiber cabling anywhere within a Fast Ethernet network topology by directly connecting to existing devices. Its compact, modular design facilitates deployment in a narrow desktop location to save space.

### Features

- Standards: IEEE 802.3 (10BASE-T) - IEEE 802.3u (100BASE-TX/FX)
- Connector: 1 x RJ-45, 1 x Fiber (ST/SC)
- Max. Distance: UTP: 100 meters (Cat.3/4/5/6), Fiber: 2km (MM), 120km (SM), 60km (SM/SF)
- MDI/MDI-X: Auto Selection
- Power: Power Input: 12V DC @ 0.8A, external power supply adapter, Frequency: 47Hz to 63Hz
- Temperature: Operating: 0°C to 50°C, Storage: -20°C to 70°C
- Humidity: Operating: 10% to 90% RH
- Storage: 5% to 90% RH
- Unit LED: PWR: Illuminated for normal operation, TX / FX LNK/ACT: Green Illuminated
- Emissions: FCC Part 15 of Class A & CE approved
- Dimensions: 86.2 x 59.4 x 23.4mm (D x W x H)
- Weight: 160g

Part Number	Description
481210-01	Fast Ethernet converter MM 100BaseT-FX, SC
482210-01	Fast Ethernet converter MM 100BaseT-FX, ST
481210-02	Fast Ethernet converter SM 100BaseT-FX, SC (30km)

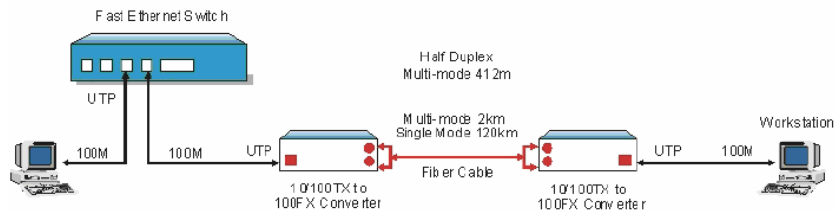

## Gigabit Media Converter

OCI-100 series is ORCA's answer to the need to expand existing Fast Ethernet networks. The easy implementation and expansion of 100Base-TX/FX networks can be further facilitated with this converter. The converter is completely transparent when connected, so the network performs exactly the way it did before, only now it allows the co-existence of both copper and fiber mediums. Added flexibility is available with ST, SC, and WDM Simplex SC connectors. Extra distances are possible with the single-mode version delivering up to 80km connectivity per transmission segment. The OCI-100 allows the installation of fiber cabling anywhere within a Fast Ethernet network topology by directly connecting to existing devices. Its compact, modular design facilitates deployment in a narrow desktop location to save space.



### Features

- Standards: IEEE 802.3ab 63Hz
- 1000Base-T - IEEE 802.3z
- 1000Base-SX/LX
- Connector: 1 x RJ-45 - 1 x Fiber
- Max. Distance: UTP: 100 meters (Cat. 5) - Fiber: SFP; up to 80km (single-mode)
- Unit LED: PWR: Illuminated for normal operation FD: Illuminated when working in full duplex mode LNK: Illuminated when receiving link pulses from compliant devices RCV: Illuminated or flashing when data packets are being transmitted / received
- MDI/MDI-X: Auto Selection
- Power: Power Input: 12V DC @ 0.8A, external power supply adapter - Frequency: 47Hz to 63Hz
- Temperature: Operating: 0°C to 50°C - Storage: -20°C to 70°C
- Humidity: Operating: 10% to 90% RH - Storage: 5% to 90% RH
- Emissions: FCC Part 15 of Class A & CE approved
- Dimensions: 109.2 x 73.8 x 23.4mm (D x W x H)
- Weight: 160g
- Dip Switches: DIP 1 – LLBK: Copper port local loop back Enable or Disable (On: Enable Off: Disable)
- DIP 1 – RLBK: Fiber port remote loop back Enable or Disable (On: Enable Off: Disable)

Part Number	Description
481220-01	Fast Ethernet converter MM 1000Base T-SX, SC
481220-02	Fast Ethernet converter MM 1000Base T-LX, SC